

Parafon® Classic



Parafon Classic is a removable acoustic tile of high quality with edge configuration A and E for installation in a grid system. With a surface made of pre-painted glass fibre with low gloss factor and an aesthetically pleasing appearance, the sound absorber is suitable for all types of indoor environments.

Product Description

Facing material: White pre-painted glass fiber surface layer.

Backside: Thin glass fiber tissue.

Treatment of edges: Edge A is thin spray painted, Edge E is painted.

Edges & Dimensions



Thickness	Width x Length (modular size)	Weight kg/m ²	Min. suspension height for demounting
A24			
15	600 x 600 mm	1,1	90
	600 x 1200 mm		
18	1200 x 1200 mm	1,4	
20	600 x 600 mm	1,5	
	600 x 1200 mm		
25	600 x 600 mm	1,8	
	600 x 1200 mm		
	600 x 2400 mm		
40	600 x 600 mm	2,8	
	600 x 1200 mm		
E24			
15	600 x 600 mm	1,5	90
	600 x 1200 mm		
18	600 x 1800 mm (Edge A in short sides)	1,8	
	600 x 2400 mm (Edge A in short sides)		
	1200 x 1200 mm		
40	600 x 600 mm	4,0	
	600 x 1200 mm		

Performances

Reaction to fire



A1

According to: EN 13964:2014 (EN 13501-1)

Fire resistance



The fire performance of mineral wool does not deteriorate with time. The Euroclass classification of products is related to the organic content, which cannot increase with time.

Cleaning



Using a soft brush, by vacuum cleaning or by wiping with a damp cloth or sponge.

Humidity and sag resistance



May be used continuously in 95% relative humidity at a temperature of 30 °C, occasionally also at 100% and 40 °C.

Visual appearance



Gloss factor: ~2

Light reflectance



~83%

Colours



White, NCS S 0500-N

Colour codes show the nearest NCS value

Environment & sustainability



Fully recyclable stone wool

Indoor environment



M1

According to: Finnish classification

Installation



Installation with T24 suspension system.




Sound absorption



The sound absorption has been measured according to ISO 354. The absorption values and classes are calculated according to ISO 11654. NRC according to ASTM C 423.

Parafon Classic

Edge A24: 15 mm, 18 mm, 20 mm, 25 mm, 40 mm.
Suspension Height: E-200

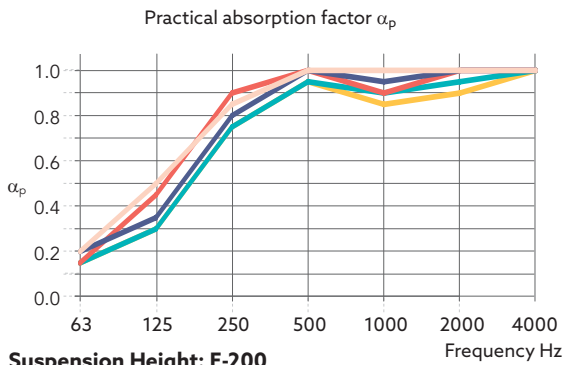


Suspension Height: E-200

Thickness: 15 mm Absorption Class: A
 Thickness: 18 mm Absorption Class: A
 Thickness: 20 mm Absorption Class: A
 Thickness: 25 mm Absorption Class: A
 Thickness: 40 mm Absorption Class: A

Thickness:	Frequency Hz							α_w	Absorption Class:	NRC
	63	125	250	500	1000	2000	4000			
15 mm	0.15	0.30	0.75	0.95	0.85	0.90	1.00	0.90	A	0.85
18 mm	0.15	0.30	0.75	0.95	0.90	0.95	1.00	0.95	A	0.90
20 mm	0.15	0.45	0.90	1.00	0.90	1.00	1.00	1.00	A	0.95
25 mm	0.20	0.35	0.80	1.00	0.95	1.00	1.00	1.00	A	0.95
40 mm	0.20	0.50	0.85	1.00	1.00	1.00	1.00	1.00	A	1.00

Parafon Classic

Edge A24: 40 mm.
Direct Fixing

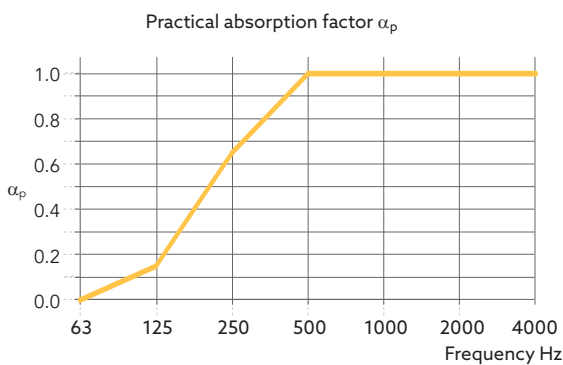

Direct Fixing

Thickness: 40 mm Absorption Class: A

Thickness:	Frequency Hz							α_w	Absorption Class:	NRC
	63	125	250	500	1000	2000	4000			
40 mm	0.00	0.15	0.65	1.00	1.00	1.00	1.00	0.95	A	1.00


Sound absorption



The sound absorption has been measured according to ISO 354. The absorption values and classes are calculated according to ISO 11654. NRC according to ASTM C 423.

Parafon Classic

Edge E: 15 mm, 18 mm, 40 mm.
Suspension Height: E-200

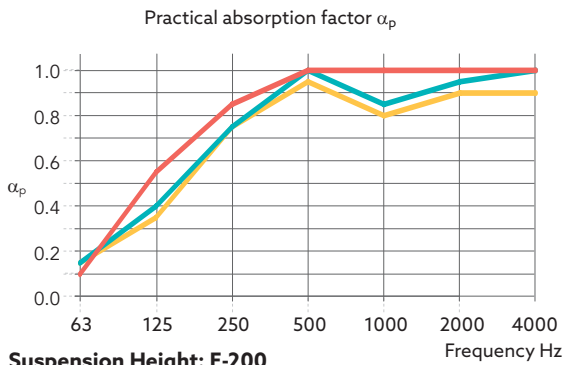

Suspension Height: E-200

- Thickness: 15 mm Absorption Class: A —
- Thickness: 18 mm Absorption Class: A —
- Thickness: 40 mm Absorption Class: A —

Thickness:	Frequency Hz							α_w	Absorption Class:	NRC
	63	125	250	500	1000	2000	4000			
15 mm	0.15	0.35	0.75	0.95	0.80	0.90	0.90	0.90	A	0.85
18 mm	0.15	0.40	0.75	1.00	0.85	0.95	1.00	0.95	A	0.90
40 mm	0.10	0.55	0.85	1.00	1.00	1.00	1.00	1.00	A	0.95

Parafon® is a registered trademark
of the ROCKWOOL Group.

 [Linkedin.com/Parafon](https://www.linkedin.com/company/parafon)

 [Youtube.com/Parafon](https://www.youtube.com/channel/UC...)

www.parafon.com

03.2022 | All colour codes mentioned are based on the NCS - Natural Colour System® property of
and used on license from NCS Colour AB, Stockholm 2012
or the RAL colour standard. Subject to alterations in range and product technology without prior
notice. Parafon accepts no responsibility for printing errors.

Parafon
(ROCKWOOL AB)

Reception:
Lillebovägen 2
541 91 Skövde

Delivery address:
Rydsdalsvägen 9
541 91 Skövde

E-mail: order@parafon.com
Tel.: +46 (0)500-10 11 00

