


Teetanium T24 LG24

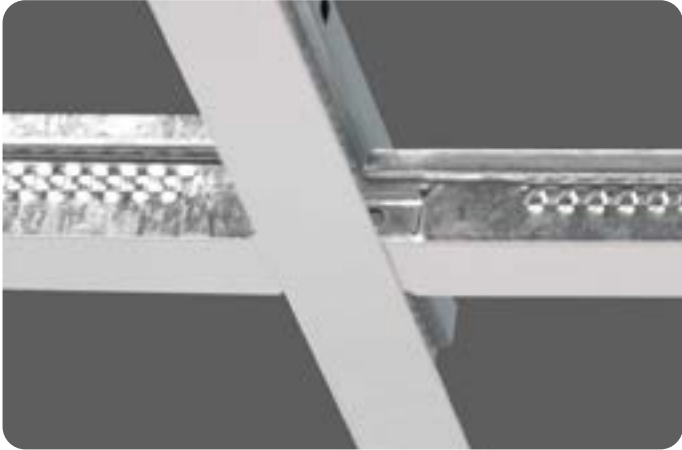

The Teetanium LG24 is a T-24 galvanized steel suspension system with high torsional strength from the manufacturer Cipriani. The main runner profile has a fire break feature and the cross tee has an extra long lip facilitating the installation. Connection is made with an audible click.

Dimensions

Component	Length (mm)	Width (mm)	Height (mm)	Colour
Main runner T24 LG24	3700	24	38	White, Matt Black
Cross tee T24 LG24	600	24	25	White, Matt Black
	1200	24	33	White, Matt Black
Cross tee T24 HD24	1800	24	38	White
Perimeter trim	3000	21	21	White
Perimeter trim	3000	19	24	Matt Black
Shadow list	3000	14 + 17	17 + 8.5	White, Matt Black

Performances

Reaction to fire



A1
According to: EN 13964: 2014

Corrosion resistance



B
According to: EN 13964: 2014

Colours



White, RAL 9016, nearest NCS S0502-G
Matt Black, RAL 9005

Load bearing



According to: EN 13964: 2014

Maximum permissible payload kg/m ²					
Main runner distance	Module (mm)	Suspension distance (mm)			
		800	1000	1200	
1200 mm	600x600	12.7	10.5	7.5	
1200 mm	1200x600	14	11.5	8	
600 mm	600x600	20	20	15	
600 mm	1200x600	20	20	15	

The load per m² must be distributed uniformly (no point loads) over the ceiling area.
The deflection load has been calculated in accordance with the class 1 (L/500) of EN 13964, provided the grid layout is as presented in the sketch. Concentrated loads or additional weights such as lights, smoke detectors, air ducts, suspended signs, etc. are not allowed.
The maximum load per m² shown in the table includes ceiling tile weight and any additional weight such as mineral wool or glass fiber, to improve the acoustic, and fire resistance features.

Parafon® is a registered trademark
of the ROCKWOOL Group.



[Linkedin.com/Parafon](https://www.linkedin.com/company/parafon)



[Youtube.com/Parafon](https://www.youtube.com/channel/UC...)

www.parafon.com

02.2022 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and
used on license from NCS Colour AB, Stockholm 2012
or the RAL colour standard. Subject to alterations in range and product technology without prior
notice. Parafon accepts no responsibility for printing errors.

Parafon
(ROCKWOOL AB)

Reception:
Lillebovägen 2
541 91 Skövde

Delivery address:
Rydsdalsvägen 9
541 91 Skövde

E-mail: order@parafon.com
Tel.: +46 (0)500-10 11 00

