


Parafon® Buller Perform

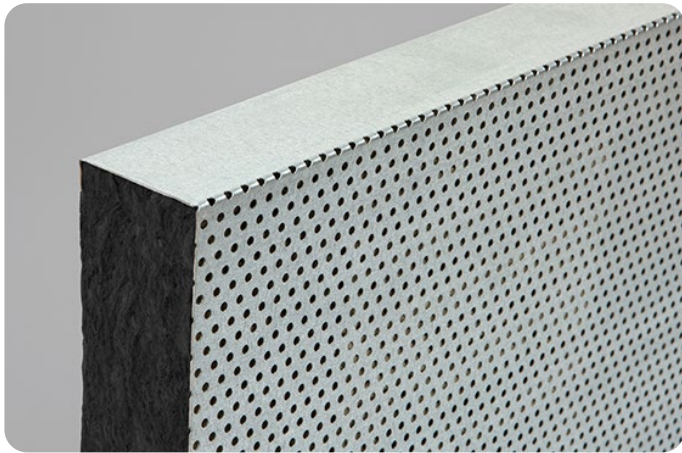

Parafon Perforated Steel Cassette is an effective acoustic panel that has a core of non-combustible mineral wool and shell made of perforated sheet metal.

Product Description

Facing material: Cassette of 0.5mm thick perforated sheets, galvanized or white lacquered. Hole diameters of 3 mm, coverage: 15%. Core of mineral wool slab, Buller Black.

Treatment of edges: Sheet metal cover the long edges and on short sides the Buller absorber sealed edge are visible.

Edges & Dimensions



Thickness	Width x Length (modular size)	Weight kg/m ²
A		
50	592 x 1192 mm (fixed size)	6,6

Performances

Reaction to fire



A1

According to: EN 13964:2014 (EN 13501-1)

Fire resistance



The fire performance of mineral wool does not deteriorate with time. The Euroclass classification of products is related to the organic content, which cannot increase with time.

Cleaning



May be cleaned using a soft brush, by vacuum cleaning or by wiping with a damp cloth or sponge.

Humidity and sag resistance



May be used continuously in 90% relative humidity at a temperature of 30°C.

Colours



Galvanized steel metal & White steel metal

Environment & sustainability



Fully recyclable stone wool

Indoor environment



M1, Danish Indoor Climate Labelling class 2.



Installation



Installation to wall either horizontally or vertically with hat profile or with screw and washer.


Sound absorption



The sound absorption has been measured according to ISO 354. The absorption values and classes are calculated according to ISO 11654. NRC according to ASTM C 423.

Parafon Buller Perform

Edge A: 50 mm.
Direct Fixing

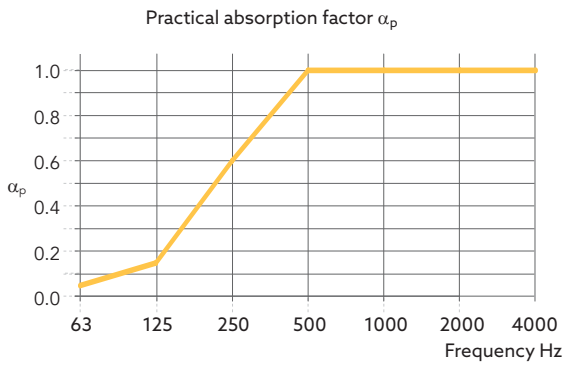

Direct Fixing

Thickness: 50 mm Absorption Class: A —

Thickness:	Frequency Hz							α_w	Absorption Class:	NRC
	63	125	250	500	1000	2000	4000			
50 mm	0.05	0.15	0.60	1.00	1.00	1.00	1.00	0.90	A	0.90

Parafon® is a registered trademark
of the ROCKWOOL Group.



[Linkedin.com/Parafon](https://www.linkedin.com/company/parafon)



[Youtube.com/Parafon](https://www.youtube.com/channel/UC...)

www.parafon.com

03.2023 | All colour codes mentioned are based on the NCS - Natural Colour System® property of
and used on license from NCS Colour AB, Stockholm 2012
or the RAL colour standard. Subject to alterations in range and product technology without prior
notice. Parafon accepts no responsibility for printing errors.

Parafon
(ROCKWOOL AB)

Reception:
Lillebovägen 2
541 91 Skövde

Delivery address:
Rydsdalsvägen 9
541 91 Skövde

E-mail: order@parafon.com
Tel.: +46 (0)500-10 11 00

