

Parafon® Wall Panel Slugger



Parafon Wall Panel Slugger are sound-absorbing and impact-resistant wall panels for installing directly on walls. The surface is covered with the strong glass-fibre fabric Slugger, which is dirt-repelling and easy to clean. Available in white, grey and black and can be used as a notice board.

Product Description

Facing material: High quality glass fiber woven surface layer.

White, grey and black color options.

Backside: Thin glass fiber tissue.

Treatment of edges: Unpainted.

Edges & Dimensions



Thickness	Width x Length (modular size)	Weight kg/m ²
A		
40	1197 x 2700 mm (fixed size)	4,0

Performances

Reaction to fire



A2-s1,d0

According to: EN 13964:2014 (EN 13501-1)

Fire resistance



The fire performance of mineral wool does not deteriorate with time. The Euroclass classification of products is related to the organic content, which cannot increase with time.

Cleaning



May be cleaned using a soft brush, by vacuum cleaning or by wiping with a damp cloth or sponge.

Humidity and sag resistance



May be used continuously in 95% relative humidity at a temperature of 30 °C, occasionally also at 100% and 40 °C.

Visual appearance



Gloss factor:
White: 3
Grey: 3
Black: 1

Light reflectance



White: 83%
Grey: 48%
Black: 5%

Colours



White: NCS S 0502-R50B
Grey: NCS S 2502-G
Black: NCS S 9000-N

Colour codes show the nearest NCS value

Environment & sustainability



Fully recyclable stone wool

Indoor environment



Danish Indoor Climate Labelling class 2.



Installation



Installation with wall U-profiles for top, bottom and edges. Joint between panels can be covered with T-profile or hat profile.


Sound absorption



The sound absorption has been measured according to ISO 354. The absorption values and classes are calculated according to ISO 11654. NRC according to ASTM C 423.

Parafon Wall Panel Slugger

Edge A: 40 mm.
Direct Fixing

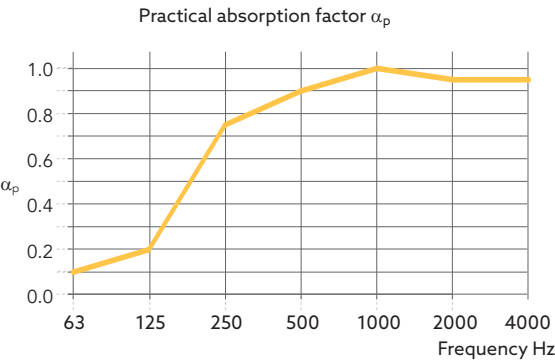

Direct Fixing

Thickness: 40 mm Absorption Class: A

Thickness:	Frequency Hz							α_w	Absorption Class:	NRC
	63	125	250	500	1000	2000	4000			
40 mm	0.10	0.20	0.75	0.90	1.00	0.95	0.95	0.95	A	0.90

Parafon® is a registered trademark
of the ROCKWOOL Group.



[Linkedin.com/Parafon](https://www.linkedin.com/company/parafon)



[Youtube.com/Parafon](https://www.youtube.com/channel/UCv3v3v3v3v3v3v3v3v3v3v3)

www.parafon.com

03.2023 | All colour codes mentioned are based on the NCS - Natural Colour System® property of
and used on license from NCS Colour AB, Stockholm 2012
or the RAL colour standard. Subject to alterations in range and product technology without prior
notice. Parafon accepts no responsibility for printing errors.

Parafon
(ROCKWOOL AB)

Reception:
Lillebovägen 2
541 91 Skövde

Delivery address:
Rydsdalsvägen 9
541 91 Skövde

E-mail: order@parafon.com
Tel.: +46 (0)500-10 11 00

